

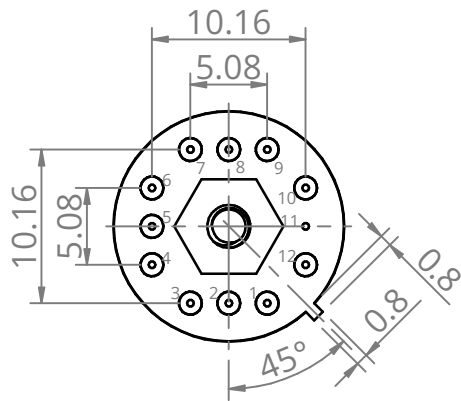


Bottom view

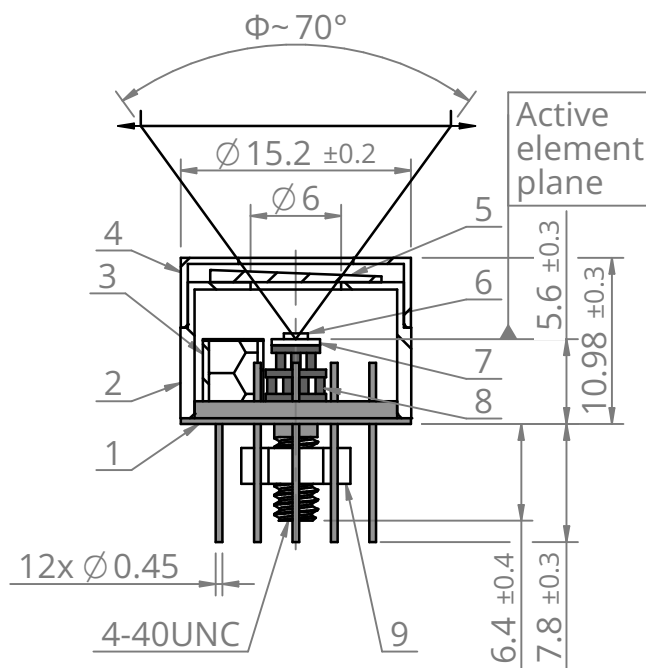


Bottom view

Photovoltaic



Pinout	
Pin No.	Connection
1	Active element anode
2	TE cooler (+)
3	Active element cathode
4	Not used
5	Not used
6	Not used
7	Thermistor
8	TE cooler (-)
9	Thermistor
10	Not used
11	Chassis ground
12	Not used



Φ - Acceptance angle

9	4-40 UNC A2 nut	Stainless steel
8	Thermoelectric cooler	
7	Active element carrier	Sapphire/Silicon
6	Active element	HgCdTe/GaAs AR
5	Window	Al ₂ O ₃ AR
4	Detector cap	Stainless steel
3	Humidity absorber container	Stainless steel
2	Detector case	Stainless steel
1	TO8 header	Gold plated Kovar
No.	Name	Material

FIRST ANGLE
PROJECTIONUNIT: mm
GENERAL TOLERANCE:
ISO 2768-mKScale
2:1Sheet
1/1Size
A4

This document is the property of VIGO Photonics S.A. and may not be disclosed to third parties, copied or used in whole or in part for any purpose without written permission from VIGO Photonics S.A.

Date
18.11.2025Drawing No.
ZRTMP-TO8-Z023Rev.
1Title
2TE-TO8(12p)-wW, PV-AR detectorVIGO
PHOTONICS