


LabM-I-6-01

2.5 – 7.0 µm and over 3 MHz HgCdTe programmable, laboratory IR detection module with optically immersed photovoltaic detector

LabM-I-6-01 is a laboratory IR detection module with optically immersed photovoltaic detector based on HgCdTe heterostructure, integrated with transimpedance, programmable preamplifier. 3° wedged zinc selenide anti-reflection coated window prevents unwanted interference effects. For proper operation programmable „smart” VIGO thermoelctric cooler controller PTCC-01 (sold separately) and Smart Manager Software (freeware) are required. LabM-I-6-01 module comes complete with PTCC-01 and Smart Manager is the best solution for prototyping and R&D stage in a variety of MWIR applications. This set provides flexible approach to different needs of system designers.

Spectral response ($T_a = 20^\circ\text{C}$)

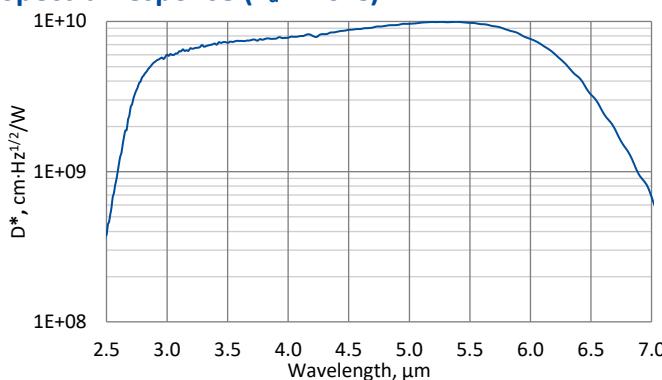

Exemplary spectral detectivity, the spectral response of delivered devices may differ.



Specification ($T_a = 20^\circ\text{C}$, default module settings)

Parameter	Typical value
Optical parameters	
Cut-on wavelength $\lambda_{\text{cut-on}}$ (10%), µm	3.0 ± 1.0
Peak wavelength λ_{peak} , µm	5.2 ± 0.5
Optimum wavelength λ_{opt} , µm	6.0
Cut-off wavelength $\lambda_{\text{cut-off}}$ (10%), µm	6.7 ± 0.3
Detectivity $D^*(\lambda_{\text{peak}}, 25 \text{ kV/A})$, $\text{cm} \cdot \text{Hz}^{1/2} / \text{W}$	$\geq 1.0 \times 10^{10}$
Detectivity $D^*(\lambda_{\text{opt}}, 25 \text{ kV/A})$, $\text{cm} \cdot \text{Hz}^{1/2} / \text{W}$	$\geq 7.0 \times 10^9$
Output noise density $v_n(10 \text{ MHz})$, $\text{nV} / \text{Hz}^{1/2}$	≤ 500
Electrical parameters	
Voltage responsivity $R_V(\lambda_{\text{peak}}, 25 \text{ kV/A})$, V/W	$\geq 5.0 \times 10^4$
Voltage responsivity $R_V(\lambda_{\text{opt}}, 25 \text{ kV/A})$, V/W	$\geq 3.5 \times 10^4$
Low cut-off frequency f_{lo} , Hz	DC/10 (adjustable)
High cut-off frequency f_{hi} , Hz	$\geq 3\text{M}$ (adjustable)
Output impedance R_{out} , Ω	50
Output voltage swing V_{out} , V	1 ($R_L = 50 \Omega^*$)
Output voltage offset V_{off} , mV	max ± 20
Other information	
Active element material	epitaxial HgCdTe heterostructure
Optical area A_o , mm×mm	1×1
Window	wZnSeAR
Acceptance angle Φ	$\sim 36^\circ$
Ambient operating temperature T_a , $^\circ\text{C}$	10 to 30
Signal output socket	SMA
Power supply and TEC control socket	LEMO (female) ECG.0B.309.CLN
Mounting hole	M4
Fan	yes

^{*)} R_L – load resistance

Features

- High performance and reliability
- DC offset compensation
- Compatible with optical accessories
- Versatility and flexibility
- Quantity discounted price
- Fast delivery


Parameters configurable by the user

- Output voltage offset
- Gain (in 40 dB range)
- Bandwidth (1.5 MHz / 3 MHz)
- Coupling AC/DC
- Detector's parameters (temperature, reverse bias etc.)


Applications

- MWIR gas detection, monitoring and analysis
- Flue gas denitrification
- Fuel combustion monitoring at power plants and other industrial facilities
- Breath analysis
- Explosion prevention
- Emission control (exhaust fumes, greenhouse gases)
- Contactless temperature measurements

Mechanical layout, mm

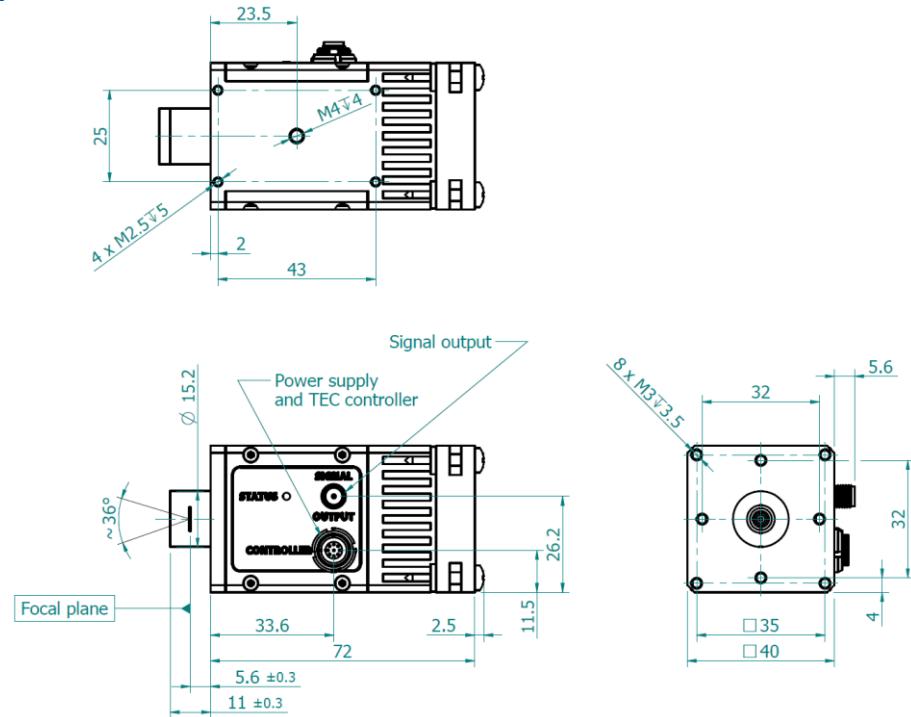


Power supply and TEC control socket LEMO (female) ECG.0B.309.CLN



Function	Symbol	Pin number
Fan and programmable preamp internal logic auxiliary supply	FAN+	1
Thermistor output (2)	TH2	2
TEC supply input (-)	TEC-	3
Power supply input (-)	-V _{sup}	4
Ground	GND	5
Power supply input (+)	+V _{sup}	6
TEC supply input (+)	TEC+	7
Thermistor output (1)	TH1	8
Bidirectional data pin	DATA	9

Schematic diagram

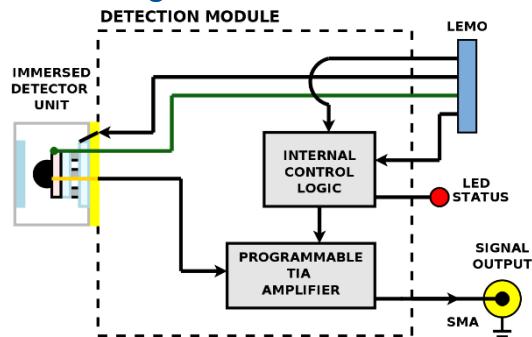

Included accessories

- **SMA-BNC, LEMO-DB9** cables

Dedicated accessories

- **PTCC-01-BAS** TEC controller + **USB: TypeA-MicroB** cable + **AC adaptor**
 - **PTCC-01-ADV** TEC controller + **USB: TypeA-MicroB** cable + **AC adaptor**
 - **PTCC-01-OEM** TEC controller + **USB: TypeA-MicroB**, **KK2-POWER** cables
 - **OTA** optical threaded adapter
 - **DRB-2** base mounting system